

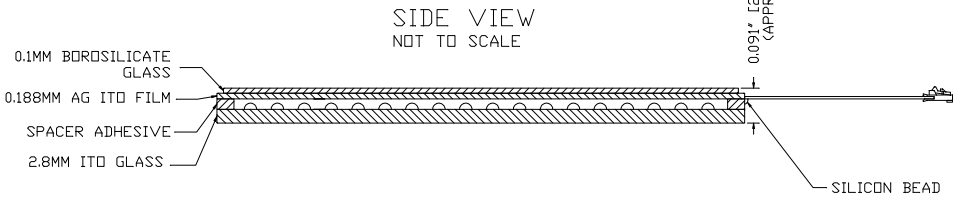


ALL DIMENSIONS ARE UNLESS OTHERWISE SPECIFIED IN MILLIMETERS. DIMENSIONS IN INCHES ARE APPROXIMATE. DIMENSIONS IN MILLIMETERS ARE PRECEDENCE OVER DIMENSIONS IN INCHES.

REVISIONS			
LET	DESCRIPTION	DATE	BY
B	ADD LATCH, RMV GASKET, MOD DIMS	04-29-11	DZ
C	CHG THICKNESS	04-29-11	DZ
D	FIX NOTES	05-03-11	DZ
E	ADD TOLERANCES, EDIT DOT & ARMOR	06-07-11	DZ
F	MOD TOLERANCES	02-21-12	DZ

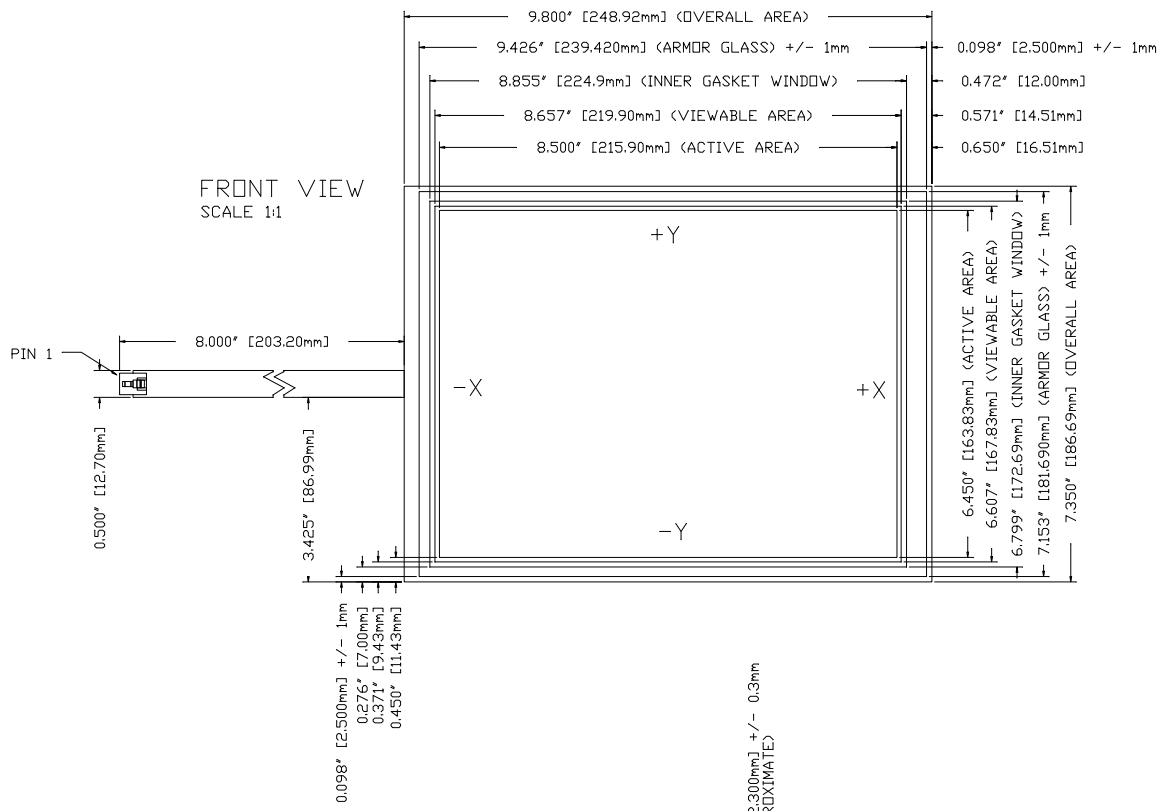

PIN	DESC
1	+X
2	+Y
3	-X
4	-Y

DETAIL A - DOT SPEC
SCALE 5:1

- NOTES:
- SUBSTRATE: 2.8MM ITO GLASS.
 - SAFETY SEAM ON ALL EDGES
 - ALL DIMENSIONS IN INCHES [MILLIMETERS]
 - CABLE: 4-PIN FPC TAIL
 - CONNECTOR: AMP TYPE WITH 0.100" [2.540MM] PITCH, LATCHING, PART NUMBER 487526-3 OR EQUIVALENT.
 - TOUCH SCREEN TO BE ACTIVATED WITHIN ACTIVE AREA ONLY. NON-ACTIVE AREA MUST HAVE A SCREENED ON DIELECTRIC AND NO CONDENSED DOTS. VIEWABLE AREA TO BE TRANSPARENT WITH NO BUSBARS VISIBLE.
 - TOTAL SENSOR THICKNESS: 0.130" [3.400MM] APPROXIMATE

		A D METRO - 1180 PARESON ST - OTTAWA, ONTARIO	
<h3>AD10.4ULTRA</h3>			
TOLERANCING UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS ARE IN THOUSANDS FRACTIONS ARE IN SIXTEENTHS	DRAWN BY: DZ DATE: 02-21-12	PRODUCT/FABRICATION NO.: --- PART NO.: --- REV. NO.: ---	SHEET: 1 SHEETS: 1 AD-10.4-4RU-01-200